


The inline strapping machine for long products



- Economical owing to highest availability
- Robust and extremely low maintenance
- Powerful
- Variable strap width
- Pneumatic free

**EQUIPMENT:**

- ASLF 'Anti-Strap-Loss-Function' Constant strap control
- Automatic Strap feed
- Strap width 5 - 12 mm, either
- Strap end detection system with automatic discharge of remaining strap
- Coil outside
- Operation Terminal with Soft-Button
- DAT 'Direct-Access-Technology'
- Torque controlled strap tension, adjustable
- GreenTech energy concept, low power consumption
- Machine movable
- SAN - Small and Narrow
- Table height steplessly adjustable
- Removable front table top, without tools
- Wear-free, energy saving direct-drive-motors
- Low maintenance and low wear strap arch
- **Many specific options available, easily configurable**
- Interface for integration into automatic lines

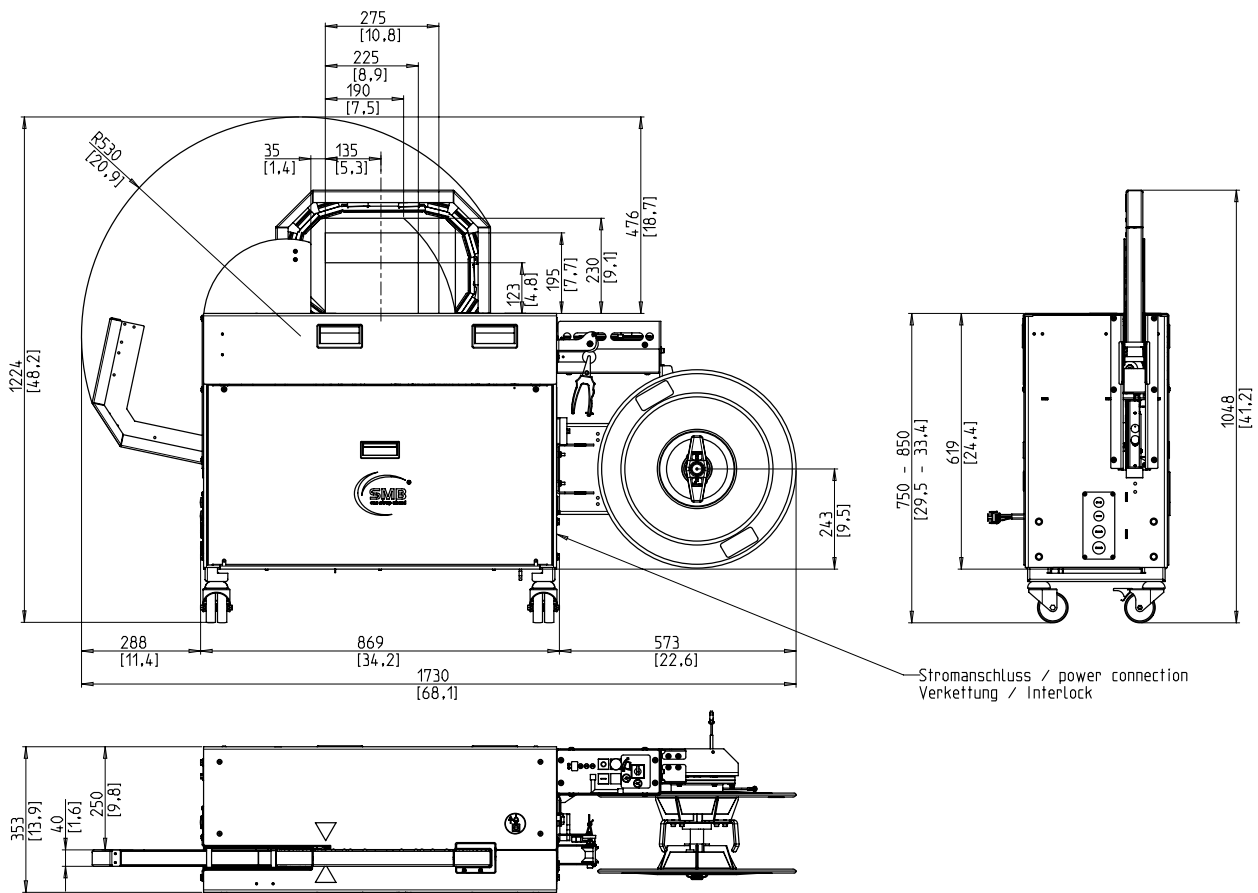

## TECHNICAL SPECIFICATION:

### CAPACITY:

Single strap, bundles/minute up to: 20  
Depending on tension force

### BUNDLES:

Width in mm  
Min.: 40  
Max.: 250  
Height in mm  
Min.: 5  
Max.: 170  
Max. bundle height depending on (see drawing)  
Weight in kg  
Max.: 35

### STRAP TENSION:

Adjustable with 10 steps  
Automatic strap tensioning  
Tension at bundle in N  
Max.: 450

### STRAPPING MATERIAL:

PP and PET Strap DIN EN 13 394  
Width in mm: 5 - 12  
Thickness in mm: 0,4 - 0,65

### SEALING METHOD:

Heat seal. Tensile strength of welded joint is approx. 80% of the breaking strength of the strap

### STRAP COIL:

Core ID in mm: 200 - 228  
Core OD in mm: 420  
Width in mm: 160 - 190

### POWER SUPPLY:

Wide Range Input 100-240V, 1AC; 47-63 Hz  
Maximum fusing 16A (B-character)  
Protection Type: IP 22

### POWER CONSUMPTION:

Power consumption in kW approx.: 0,25

### WEIGHT:

Total weight approx. in kg: 175

### OPERATING CONDITIONS:

Temperature range in °C [°F]: +5 [41] - +45 [113]