

Inline Premium – THE cross strapping solution for the graphic industry – without bundle turning




- User-friendly and intuitive
- Economical owing to highest availability
- Variable strap width
- Optimal access
- Intrinsically safe machine, protection door-less concept
- Unique, the lateral strapper principle in the inline strapper

EQUIPMENT:

- 5000 bundle recipes
- ASLF 'Anti-Strap-Loss-Function' Constant strap control
- Strap width 5 - 9 mm, adjustable
- Automatic strap threading, soft
- Strap end detection system with automatic discharge of remaining strap
- Automatic strap tensioning, stepless
- Strap coil detection with yellow indicator lamp
- DAT 'Direct-Access-Technology'
- The exclusive eject function avoids strap jam
- Torque controlled strap tension, adjustable
- Upstream and downstream interlocks with complete plug connection
- EPP 'Exact Product Path'
- ETS 'Easy to Service' - Maintenance while production
- Conveyor speed steplessly adjustable
- GreenTech energy concept, low power consumption
- High-Speed-Kit, optional
- Bundle stops, optional
- Bundle press, optional
- Production data analysis via Ethernet/USB
- SAO 'Safe and Open' - Safe without protection doors
- SMART TOUCH 4.0 – Icon control concept
- Wear-free, energy saving direct-drive-motors
- Wear-free Strap-frame by stainless steel guide
- Many specific options available, easily configurable

SMB INLINE

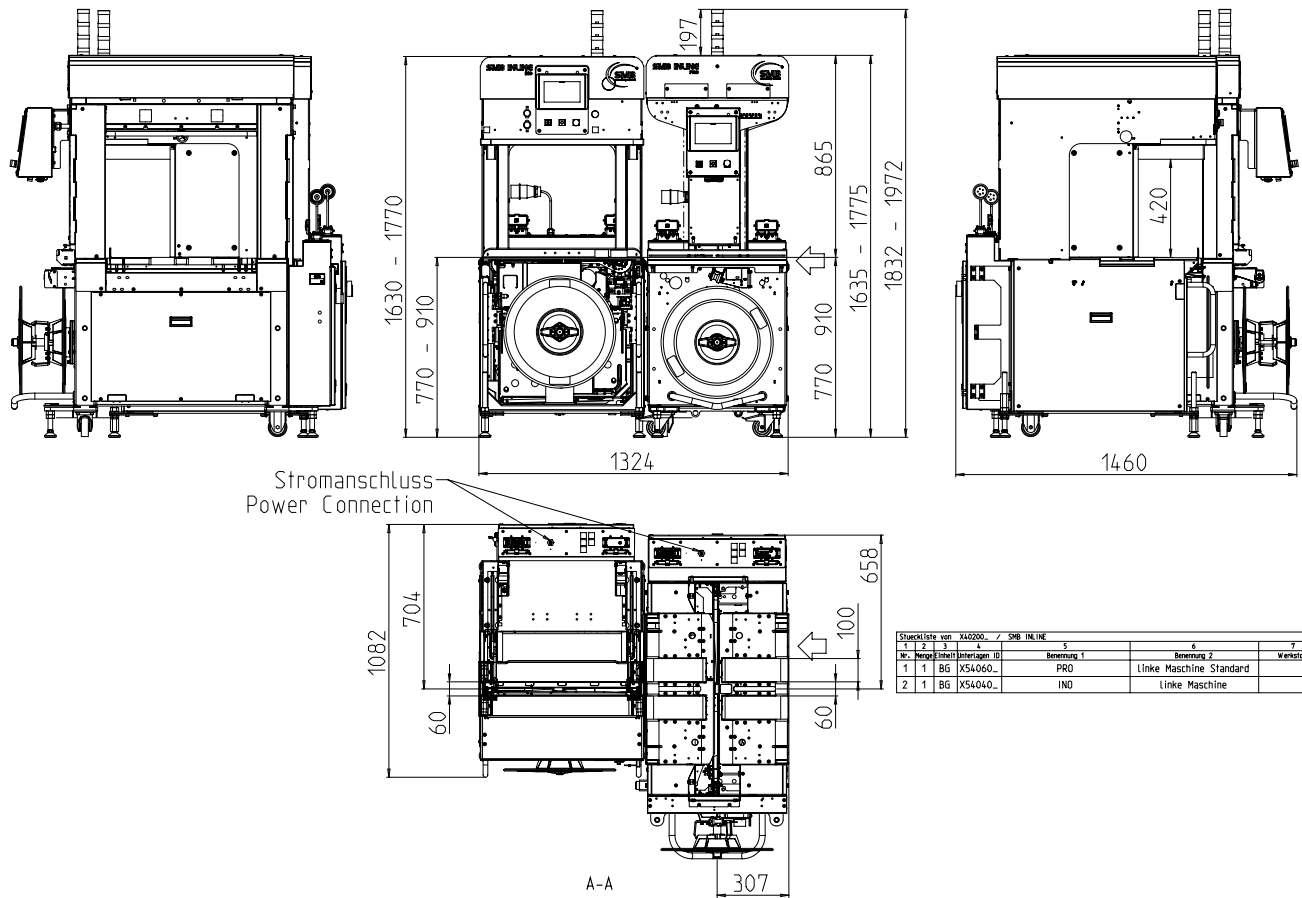

Stueckliste von 210200... / SMB INLINE		5	6	7	
1	2	3	4		
Nr.	Menge	Interlagen ID	Benennung 1	Benennung 2	Werkstoff
1	1	BG X54060...	PRO	Linke Maschine Standard	
2	1	BG X54040...	INO	Linke Maschine	

TECHNICAL SPECIFICATION:

CAPACITY:

Cross strap, bundles/minute: 32/ opt. 36
 At table belt speed in m/s: 1
 Based on bundle size l x w in mm: 300 x 210
 Depending on tension force

BUNDLES:

Width in mm: 150 - 420
 Length in mm: 150 - 420
 Height in mm: 10 - 400
 Weight in kg: max. 25

TRANSPORT SPEED:

m/s: 0,20 - 1,00

STRAP TENSION:

Steplessly adjustable
 Automatic strap tensioning, stepless, depending on height of bundle
 Tension at bundle in N: max. 325
 Tension path in mm: max. 200

STRAPPING MATERIAL:

Polypropylene DIN EN 13 394
 Width in mm: 5 - 9
 Thickness in mm: 0,4 - 0,55

SEALING METHOD:

Heat seal. Tensile strength of welded joint is approx. 80% of the breaking strength of the strap

STRAP COIL:

Core ID in mm: 200
 Core OD in mm: 420
 Width in mm: 190 (160,180,200)

POWER SUPPLY:

Wide Range Input 380-520V, 3AC; 47 63 Hz
 Maximum fusing 16A (B-character)
 Protection Type: IP 54

POWER CONSUMPTION:

Power consumption in kW approx.: 0,75

WEIGHT:

Total weight approx. in kg: 830

OPERATING CONDITIONS:

Temperature range in °C [°F]: +5 [41] - +45 [113]



Signode Packaging Systems GmbH

Markgrafenstraße 2 | D-95497 Goldkronach | Germany
 Tel.: +49 (0) 9273 / 982-201 | Fax.: +49 (0) 9273 / 982-100
 www.smb.biz | sales@smb.biz

