



The accumulation conveyor for integration in strapping lines




- Universal applicable
- Low maintenance
- Easy pick-up access

EQUIPMENT:

- Upstream and downstream interlocks
- Conveyor speed steplessly adjustable
- Easy pick-up access
- Power cable, length 3m
- Table height steplessly adjustable
- Maintenance free drum motor
- Many specific options available, easily configurable

SMB S03

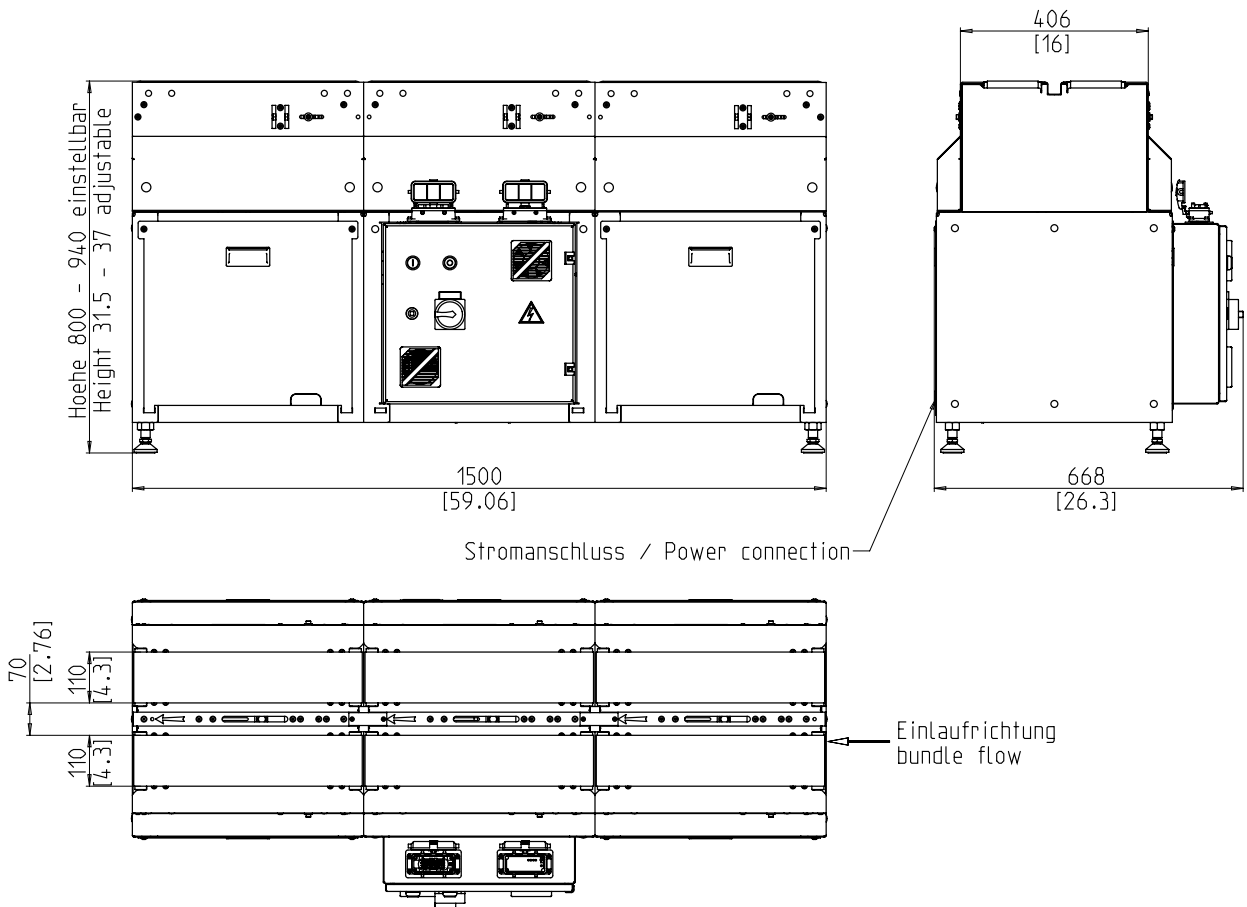

TECHNICAL SPECIFICATION:

BUNDLES:

Width in mm:	100 - 410
Length in mm:	max. 450
Height in mm:	min. 3
Weight in kg:	0,2 - 25

TRANSPORT SPEED:

m/s:	0,40 - 1,05
------	-------------

POWER SUPPLY:

400 V; 3 AC/N; 50Hz;
TN and TT network

POWER CONSUMPTION:

Power consumption in kW approx.:	1,1
----------------------------------	-----

WEIGHT:

Total weight approx. in kg:	170
-----------------------------	-----

OPERATING CONDITIONS:

Temperature range in °C [°F]:	+10 [50] - +40 [104]
-------------------------------	----------------------



Signode Packaging Systems GmbH

Markgrafenstraße 2 | D-95497 Goldkronach | Germany
Tel.: +49 (0) 9273 / 982-201 | Fax.: +49 (0) 9273 / 982-100
www.smb.biz | sales@smb.biz



SIGNODE

